Removable Gooseneck Lowbeds


RGN50DA with HD50


Highest Payloads, Easiest Loading.

The Martin 3 axle RGN50 is designed to run with or without a single axle dolly (Model HD50). The versatility of these units combined with its excellent weight distribution characteristics is the ideal trailer for moving mining and construction machinery in the 45 tonne to 55 tonne range.

The trailer incorporates unique features such as the pre-stressed deck and the Martin heavy duty suspension allowing for lighter tare weight, higher payloads and decreased maintenance. Frames are constructed from T-1 high strength/high tensile steels to increase the life of trailer and further allow for maximum payloads.

The ability to run with or without the dolly increases operator efficiency and decreases maintenance. With the dolly, the combination can reach payloads as high as 58 tonnes and without the dolly payloads are in the region of 50 tonnes.

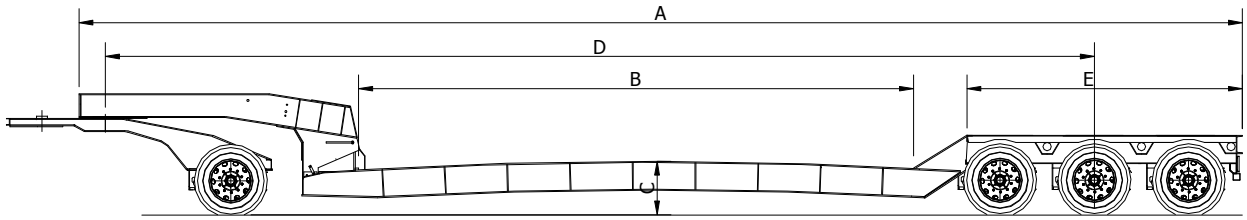

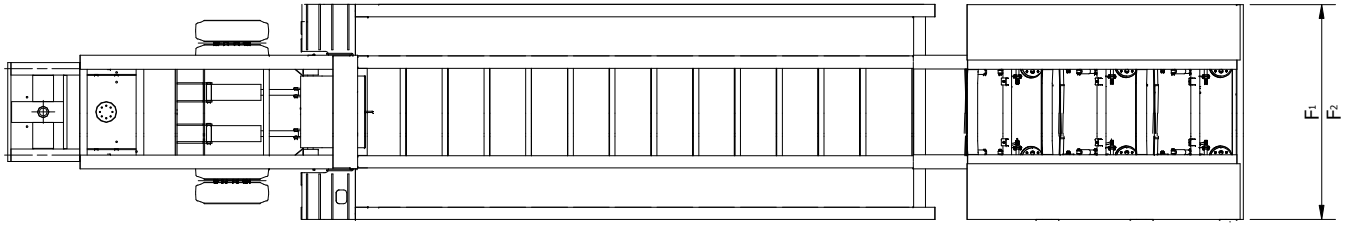

MODEL	CONFIGURATION	AXLE QUA.	KINGPIN	PAYLOAD	G.V.M.	TARE	A	B	C	D	E	F1	F2
RGN50	PRE-STRESS DROP DECK	3+1	89mm	58000kg	73000kg	11800kg	16800mm	8000mm	800mm	14270mm	3980mm	3100mm	3300mm

Axle: 420x180 brake, 127 Round, 12T capacity.

Suspension: Martin Heavy Duty Air Suspension, 13T Capacity, Fabricated High Tensile Beam.

Brakes: SABS approved ABS system including suzi connection, 24V including automatic slack adjusters, twin line fail safe air brakes.

Electric: Multi-volt SABS approved systems, LED Combination Lights- two per side.

Wheels: Standard 22.5x9.00 fitted with 295/80R22.5 tyres. One spare wheel per trailer.

Decking: Hardwood imported timber, long grain structure, sides only. Centre deck open.

Other: Large Toolbox; Wheel Spanner; Bearing Spanner; Operation, Parts & Maintenance Manuals; Abnormal, Speed and Chev-ron Boards; Warning Flags and Reflectors.

Optional Extras: Air Bag Axle Lift, Air Height Control, Diesel Power Pack, Aluminium Rims, Gooseneck Hydraulic Lift., Centre Deck Covering, Front Ramps, Outriggers and Timber, Recessed Cross Members.

Contact Details:

8 Rail Road
Roodekop
Germiston
South Africa

T: +27 (0) 11 866 4200
F: +27 (0) 11 865 3142
0861 LOWBED
Email: sales@martinsa.co.za

www.martinsa.co.za

Please Note: Due to constant improvement in our products, we reserve the right to change specifications and dimensions without prior notice. Payloads are dependant on applicable legislation, truck specifications and optional equipment. This document is protected by copyright law.

MARTIN

RGN50 + HD50



Photo may include optional equipment

MARTIN

RGN50 + HD50



Photo may include optional equipment